

LINEVA U19

Professional Back-Lit LED Panel System

Less glare.
Less wiring.
More value.

Lineva U19 combines high-efficiency back-lit performance, clean visual comfort, and the practical installation advantage of the 4Blue connection system. Designed for repeatable commercial projects, it helps installers move faster while maintaining a clean, professional result.



UGR <19



Up to
180 lm/W



3-CCT
3000K / 4000K / 6500K



Standard /
DALI

PHILIPS

Philips
Driver



4Blue
T-Connector +
2 m Cable
Included



5-Year
Warranty



Why installers like it

- ✓ Cleaner repeat panel connection
- ✓ Reduced repeated ceiling wiring
- ✓ Included T-connector and interconnection cable
- ✓ Supports faster installation workflow

Technical Specifications

LINEVA U19



General

Product family:	Lineva U19
Product type:	Professional back-lit LED panel system
Nominal formats:	600×600 / 300×1200
Actual dimensions:	595×595×34 mm / 295×1195×34 mm
Control versions:	Standard / DALI
CCT:	3000K / 4000K / 6500K switch
UGR:	<19
Driver:	Philips
Warranty:	5 years
IP rating:	IP40



Performance

Efficacy:	up to 180 lm/W
CRI:	>80
Nominal power:	22 W
LED lifetime:	58,000 h (L90B10)
Photobiological safety:	RG0
Visual comfort:	Low-glare back-lit distribution



Electrical

Input voltage:	220-240 V AC, 50/60 Hz
Power factor:	>0.95
Protection class:	Class II



Construction

Optics:	PMMA
Housing:	White aluminium frame

Product variants

Model	Control version	Nominal format	Actual dimensions
Lineva U19 6060	Standard	600×600	595×595×34 mm
Lineva U19 DALI 6060	DALI	600×600	595×595×34 mm
Lineva U19 30120	Standard	300×1200	295×1195×34 mm
Lineva U19 DALI 30120	DALI	300×1200	295×1195×34 mm

Rear view



Side profile
34 mm depth



4Blue connection system




Included 4Blue T-connector + 2 m interconnection cable

Philips driver



Formats

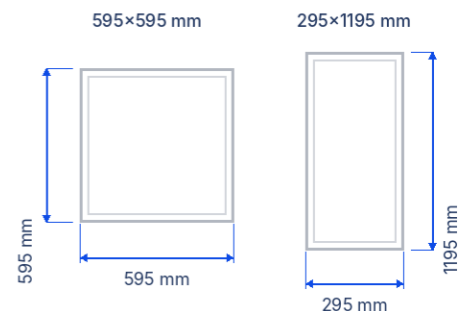

Illustrative concept sheet.
Final certified technical data
and ordering codes remain
subject to confirmation.

